


THIS DRAWING CONTAINS INFORMATION WHICH IS THE PROPRIETARY PROPERTY OF INTEL CORPORATION. THIS DRAWING IS RELEASED TO THE PUBLIC AND ITS CONTENTS MAY NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE EXPRESS WRITTEN CONSENT OF INTEL CORPORATION.

REVISIONS		
LTR	DESCRIPTION	SIGNATURE AND DATE
A	ECO 40-27263	11/1/81
B	ECO 40-3051	11/1/81

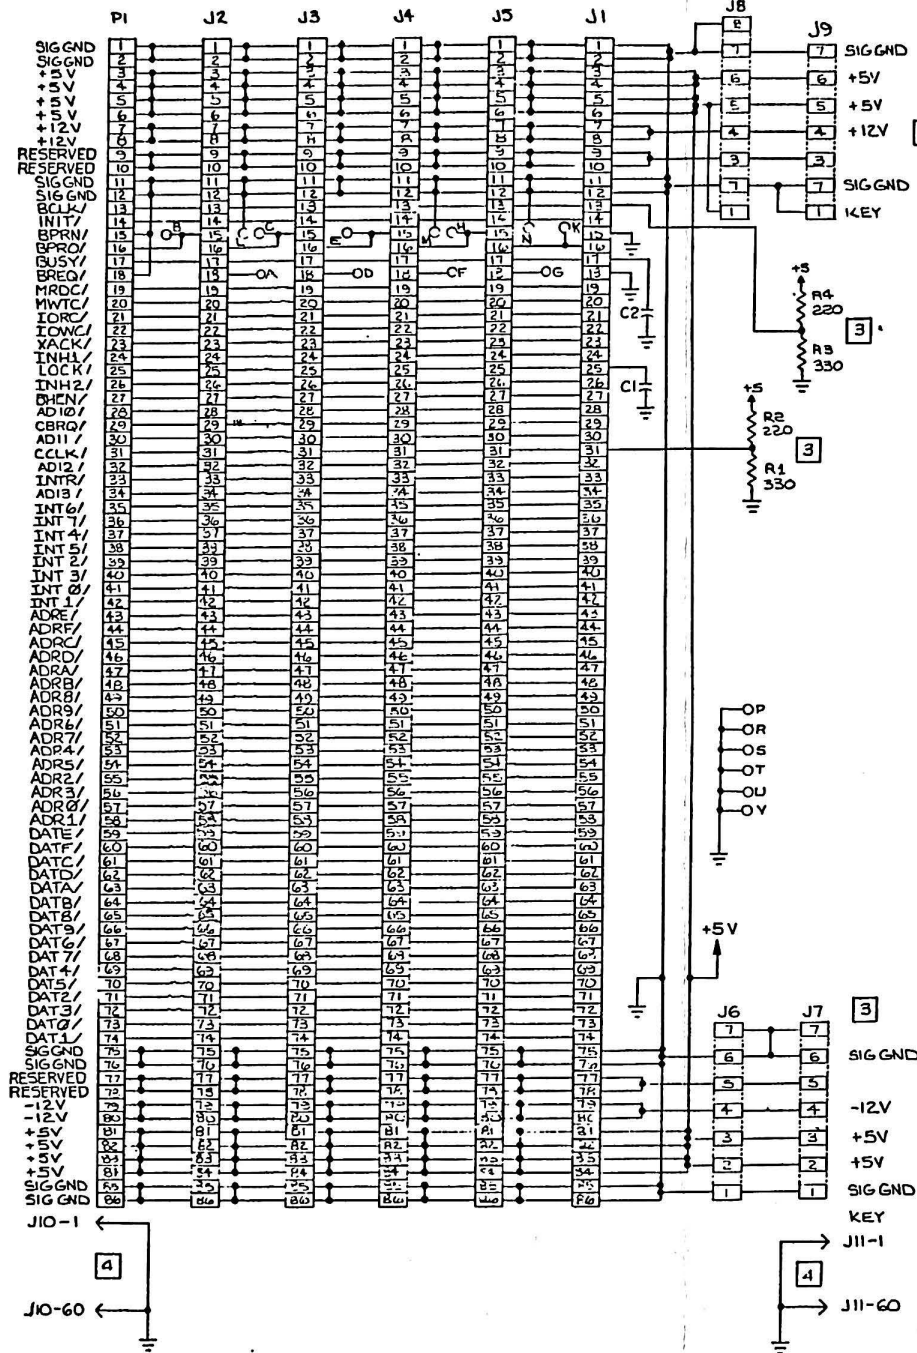


NOTES: UNLESS OTHERWISE SPECIFIED

1. RESISTANCE VALUES ARE IN OHMS, 1/4 W, 5%.
2. CAPACITANCE VALUES ARE 33 PICOFARADS, 5%, 50V.
3. J7, J9, R1-4 ARE CUSTOMER SUPPLIED AND INSTALLED.
4. J10 AND J11 PINS 1,2,4,7,13,18,20,23,24, 29,35,37,40,45,48,50,56,60 ARE CONNECTED TO GROUND.

QUANTITY PER DASH NO.		PART NUMBER		DESCRIPTION	
SCALE: N/A	TOL: 2 PLE 3 PLE ANGLE	SIGNATURE	DATE	PARTS LIST	
MATERIAL:	CHK BY: <i>Butler</i>	<div> </div>			
FRSIVE	DRN BY: <i>Butler</i>	<div> </div>			
AUTH BY:		CODE		SHEET 1 OF 1	
TITLE: SCHEMATIC, 158C614 EXPANSION BACKPLANE		SIZE: D		DRAWING NO. 144079	
REV: B		DATE: 11/1/81		BY: <i>Butler</i>	

WASH

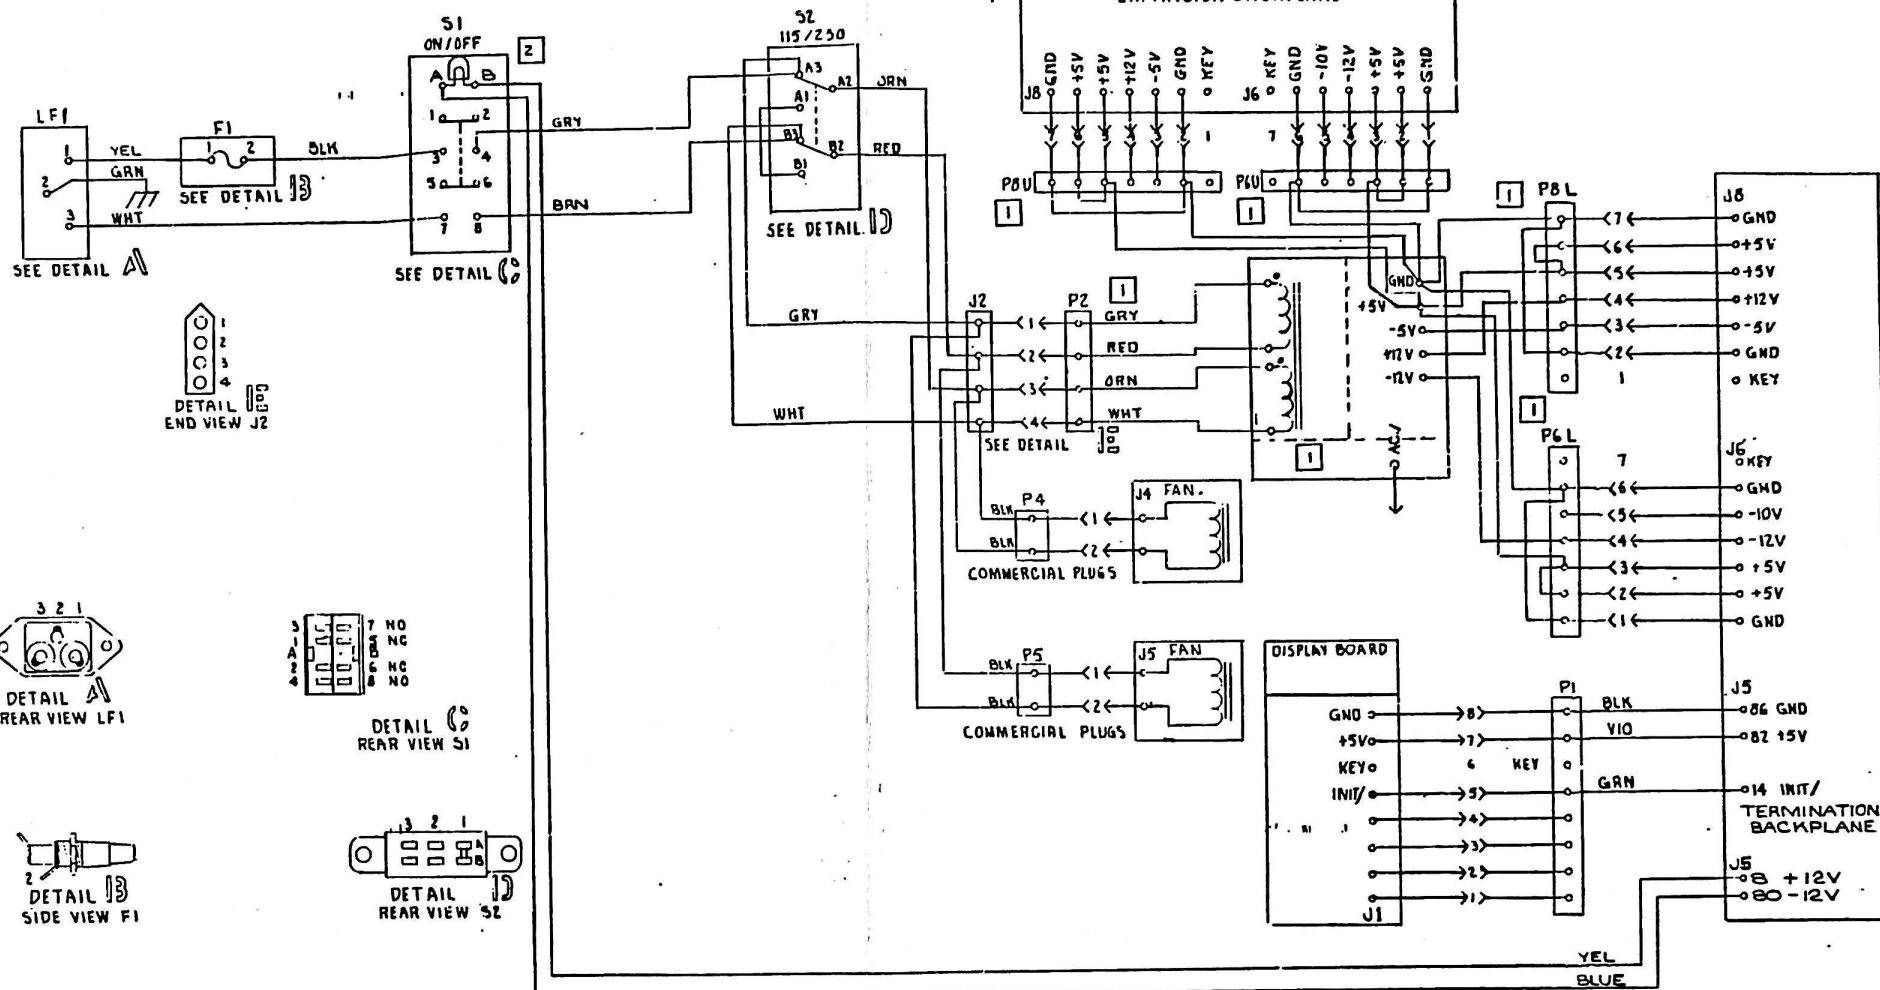

NOTES: UNLESS OTHERWISE SPECIFIED


- 1 POWER SUPPLY AND WARNERS IS SUPPLIED BY VENDOR.
- 2 BLUE WIRE SHOULD CONNECT TO GOLD TERMINAL.

ZONE	DESCRIPTION			DATE	TIME	BY
—	A	DRN 4-066	11/18/91	11:00	11/18/91	11/18/91
	B	ECO 40-1671	11/18/91	11:00	11/18/91	11/18/91

QUANTITY PER DASH NO.				ITEM NO.	PART NUMBER	DESCRIPTION
SCALE NONE				SIGNATURE	DATE	PARTS LIST
VOL. 2				CHK BY P.C. [Signature]	2-16-79	intel
3 P.L.C. 3 P.L.C. AMPL.				CHK BY [Signature]	2-16-79	WIRING DIAGRAM
MATERIAL:				CHK BY [Signature]	2-16-79	A.C. D.C. POWER
P/NOS:				CHK BY [Signature]	2-16-79	QMS 142644
NEXT ASST USED ON				CHK BY [Signature]	2-16-79	8

MASTER

THIS DRAWING, UNLESS OTHERWISE SPECIFIED, IS THE PROPERTY OF INTEL CORPORATION. THE DESIGN OR INVENTION HEREIN IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM INTEL CORPORATION.

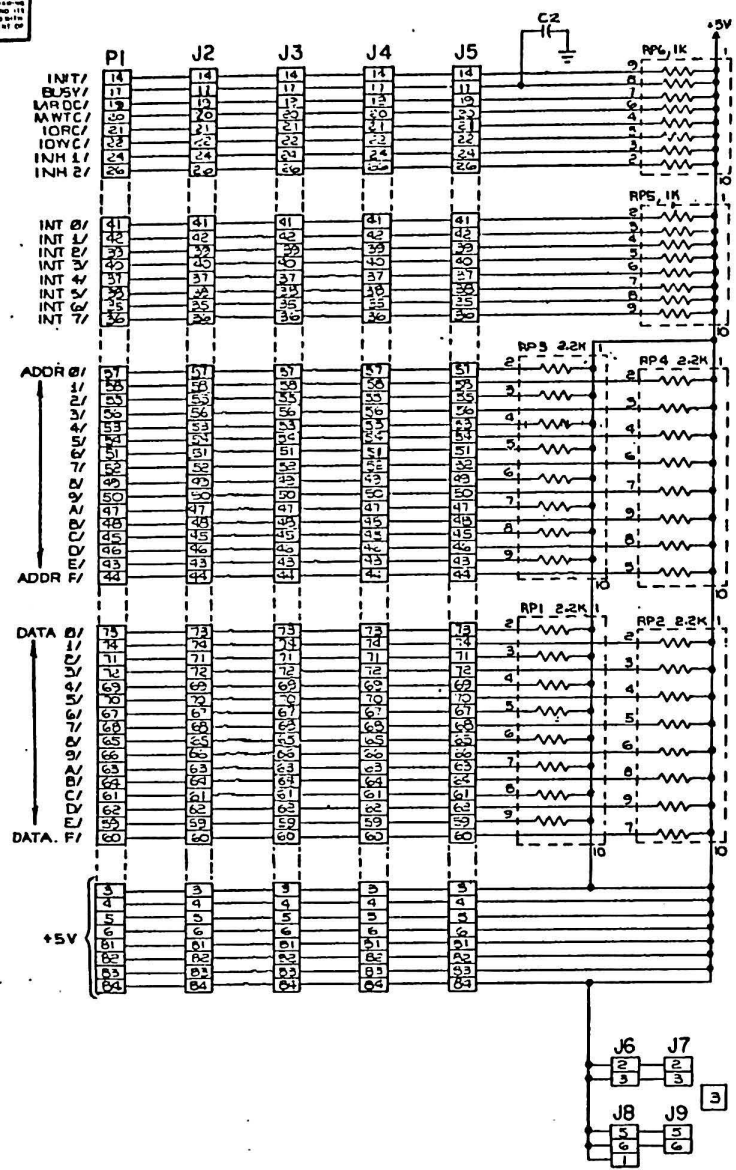


- 4. J10 PINS 1,2,4,7,13,18,20,23,24,29,35,37,40,45,48,50,56,60 ARE CONNECTED TO GROUND.
- 3. J7, AND J9 ARE CUSTOMER SUPPLIED AND INSTALLED.

2. CAPACITANCE VALUES ARE 33 PICOFARADS, 5%, 50V.

1. RESISTANCE VALUES ARE IN OHMS, 1/4 W, 5%.

NOTES: UNLESS OTHERWISE SPECIFIED.

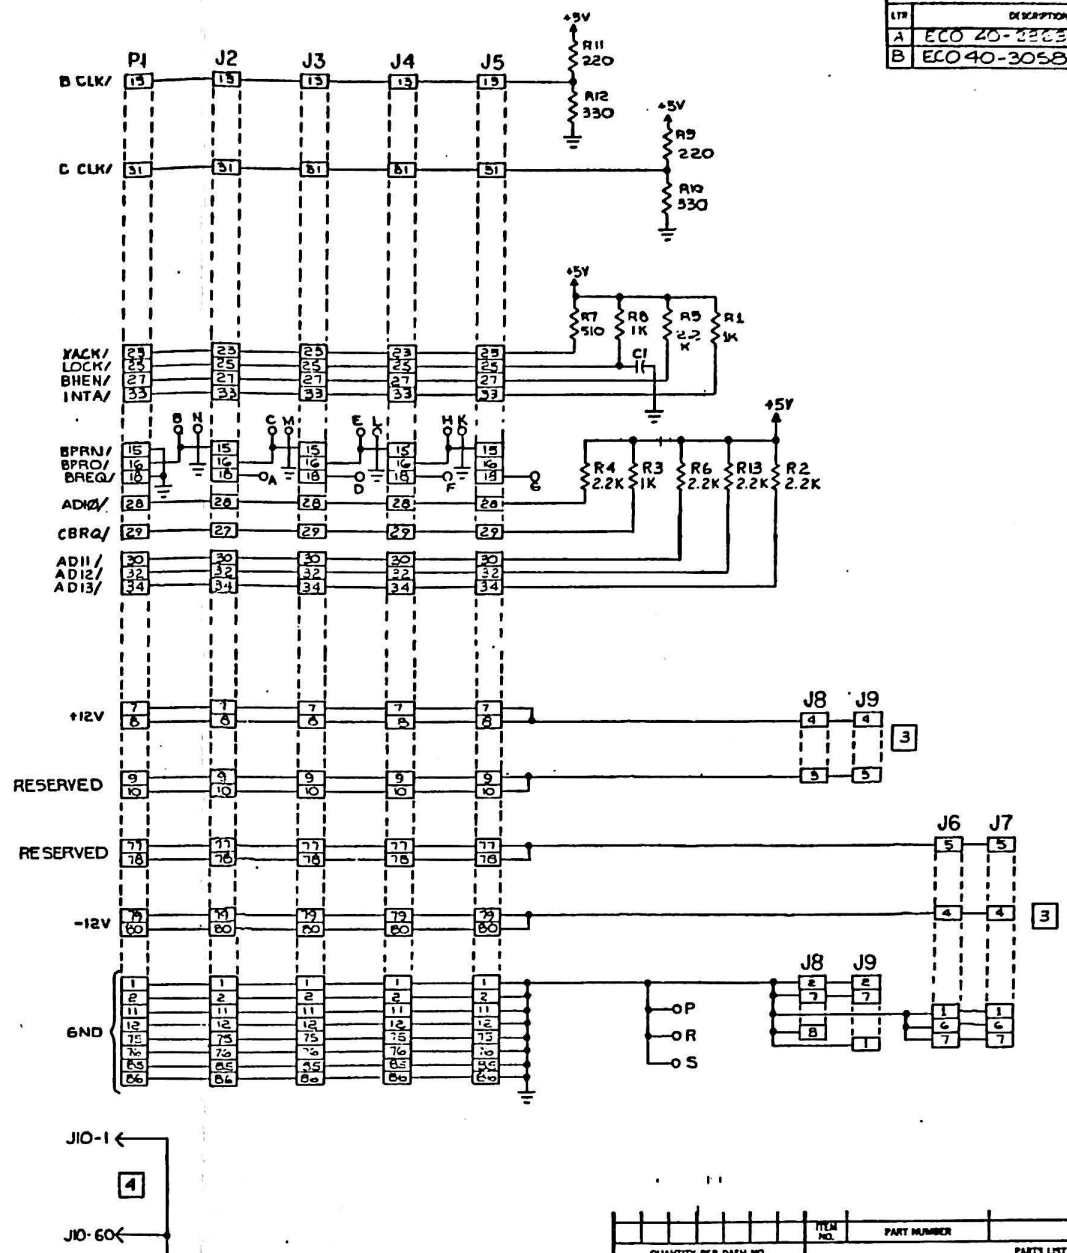

REVISIONS		
LT#	DESCRIPTION	DATE
A	ECO 40-3363	1/18/83
B	ECO 40-3058	1/18/83

QUANTITY PER DASH NO.		PART NUMBER		DESCRIPTION	
SCALE: NONE		SIGNATURE		DATE	
TOL. 2 PLC 3 PLC ANGLE		DRN BY		1/1/83	
MATERIAL		CHK BY		1/1/83	
FINISH		AUTH BY		1/1/83	
NEXT ASSY		USED ON		CODE	
		SHEET 1 OF 1		REV	
		D		40	
		144076		8	